


VERTIC LED 10362

CIRCOLO LED M  
10811


CIRCOLO LED S  
10810

CIRCOLO LED S  
10810



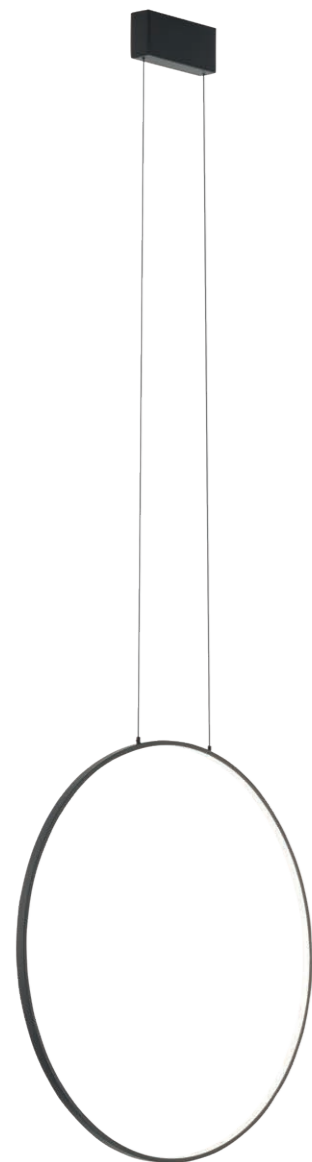


CIRCOLO LED M  
10811

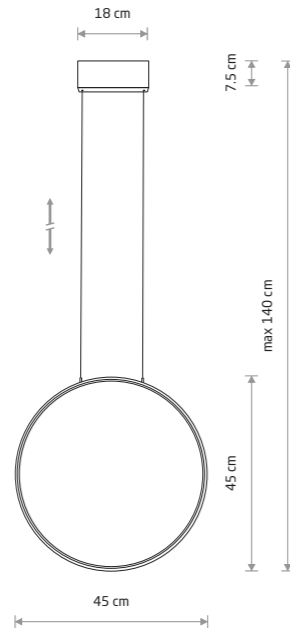

**CIRCOLO LED S**

painting aluminum, painted steel, plastic PC


■ 10810 3000K ■ 10860 4000K

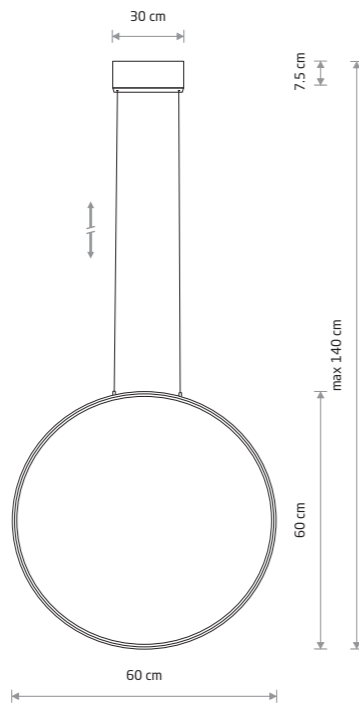


**CIRCOLO LED M**

painting aluminum, painted steel, plastic PC

■ 10811 3000K ■ 10861 4000K

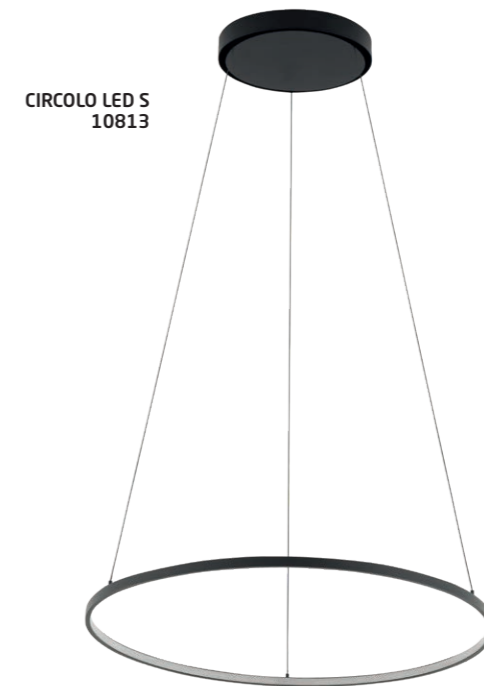


CIRCOLO LED S  
10813

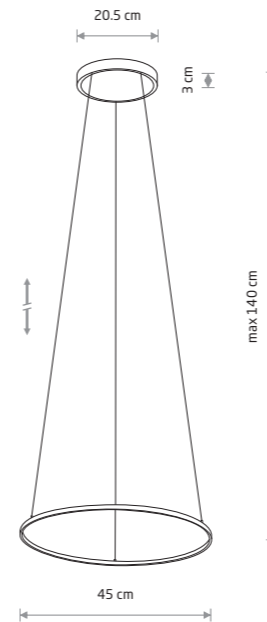

**CIRCOLO LED S**

painting aluminum, painted steel, plastic PC

■ 10813 3000K ■ 10863 4000K

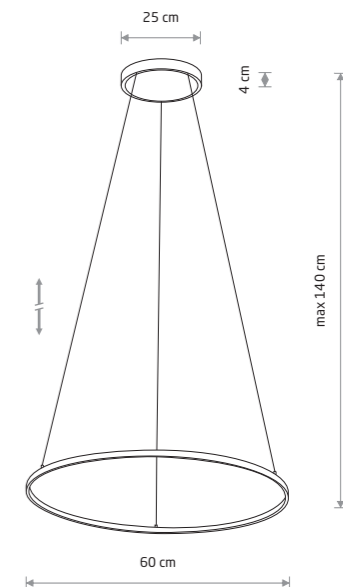

**CIRCOLO LED M**

painting aluminum, painted steel, plastic PC

■ 10812 3000K ■ 10862 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10810	18W LED	3000K	560 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10860	18W LED	4000K	600 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10811	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10861	21W LED	4000K	700 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10813	18W LED	3000K	560 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10863	18W LED	4000K	600 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10812	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10862	21W LED	4000K	700 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h