


IMPULSE LED M 8116




IMPULSE LED M
painted aluminum, plastic PC

■ 8116

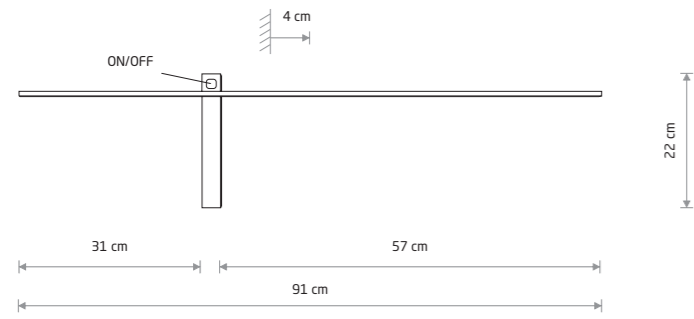


IMPULSE LED S 8115

IMPULSE LED L 8117

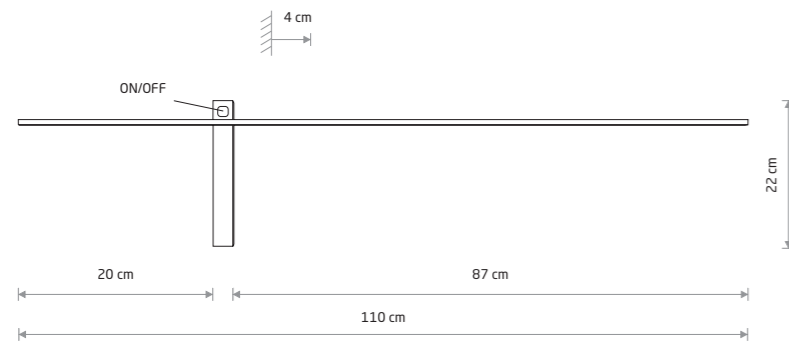

IMPULSE LED L
painted aluminum, plastic PC

■ 8117

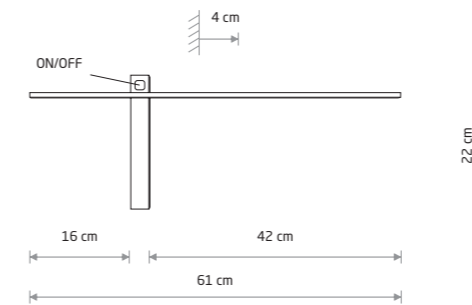

IMPULSE LED S
painted aluminum, plastic PC

■ 8115



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8115	6W LED	3000K	200 lm	120°	≥80	~220-230 V, 50/60 Hz	□	>0.5	IP23	30000h
8116	10W LED	3000K	350 lm	120°	≥80	~220-230 V, 50/60 Hz	□	>0.5	IP23	30000h
8117	15W LED	3000K	500 lm	120°	≥80	~220-230 V, 50/60 Hz	□	>0.5	IP23	30000h